

NISE 3600CE2/P2/P2E

6/7/8/9th Gen Intel® Core™ i7/i5/i3
Fanless System with Expansion



Main Features

- ♦ Support 6/7/8/9th Gen Intel® Core™ i7/i5/i3 socket type processor
- ♦ Intel® H310C PCH
- ♦ Support 1 x 2.5" SATA HDD/SSD
- ♦ 1 x VGA, 1 x HDMI and 2 x display port with independent display support
- ♦ Dual Intel® GbE LAN ports; support WoL, teaming and PXE
- ♦ 4 x USB 3.0, 2 x USB 2.0, 5 x RS232 and 1 x RS232/422/485
- ♦ 2 x Internal mini-PCIe socket support optional Wi-Fi or 4G module
- ♦ 1 x External M.2 3042 Key B & 2 x mSATA
- ♦ 1 x SIM card socket
- ♦ Support +12V to 30VDC input; support ATX power mode
- ♦ Two PCI or PCIe x4 expansion (only support PCIe x1 signal) expansion
- ♦ Support Windows 7 & Windows 10 64-bit

Product Overview

Integrated with 6/7/8/9th Gen Intel® Core™ i7/i5/i3 and H310C PCH platform, NISE series evolve to a new generation called NISE 3600C series. It is not only sustained its good reputation on quality and user friendly features but also innovated its mechanical design.

With computing and graphic performance enhancement, NISE 3600C series supports 2 x display port, 1 x VGA port and 1 x HDMI port to fulfill the graphic intensive or computing oriented applications, including auto optical Inspection, machinery automation, ePolice infotainment, surveillance or image processing equipment and healthcare industry. In addition, NISE 3600C series offers 4 x USB 3.0 and 2 x USB 2.0, greater expansion capability with 2 x Intel® GbE LAN ports, 6 x COM ports, and 1 x M.2 3042 Key B socket for front accessible availability. NISE 3600C series is sufficient to support wide range of DC input from +12 to 30V and ATX power; it is a new generation to meet most application requirements.

Specifications

CPU Support

- ♦ Support 6/7/8/9th Gen Intel® Core™ i7/i5/i3 socket type processor

Main Memory

- ♦ 2 x DDR4 2133/2400/2666 SO-DIMM socket, support up to 32GB

Display Option

- ♦ Dual independent display
 - VGA and HDMI
 - Display port and VGA
 - Display port and HDMI
 - Display port and display port

I/O Interface-Front

- ♦ ATX power on/off switch
- ♦ HDD access/power status LEDs
- ♦ 2 x USB 3.0 ports
- ♦ 2 x Display port (can be converted to DVI-D or HDMI via active cables)
- ♦ 4 x Antenna holes
- ♦ 1 x External M.2 3042 Key B & 2x mSATA (via 2x mini-PCIe socket)
- ♦ 1 x SIM card socket (for mini card 2)

I/O Interface-Rear


- ♦ 1 x DB44 serial port for 4 x COM ports
 - COM1/3/4 (RS232)
 - COM2 (RS232/422/485)
- ♦ 2 x DB9 for COM5 (RS232) & COM6 (RS232)
- ♦ 2 x USB 3.0 ports (900mA per port)
- ♦ 2 x USB 2.0 ports (500mA per port)
- ♦ 1 x VGA port
- ♦ 1 x HDMI port
- ♦ 2 x Intel® I210-AT GbE LAN ports; support WoL, teaming and PXE
- ♦ 1 x MIC-in and 1 x Line-out
- ♦ 1 x 4-pin remote power on/off switch
- ♦ +12V to 30V DC input

Expansion Slot

- ♦ 2 x Internal mini-PCIe socket support optional Wi-Fi/4G LTE
- ♦ NISE 3600CE2: two PCIe x4 expansion slot (only support PCIe 1x signal)
 - Add-on card length: 169mm max. and one 240mm max.
 - Power consumption: 10W/slot max
- ♦ NISE 3600CP2: two PCI expansion slot
 - Add-on card length: 169mm max. and one 240mm max.



Dimension Drawing

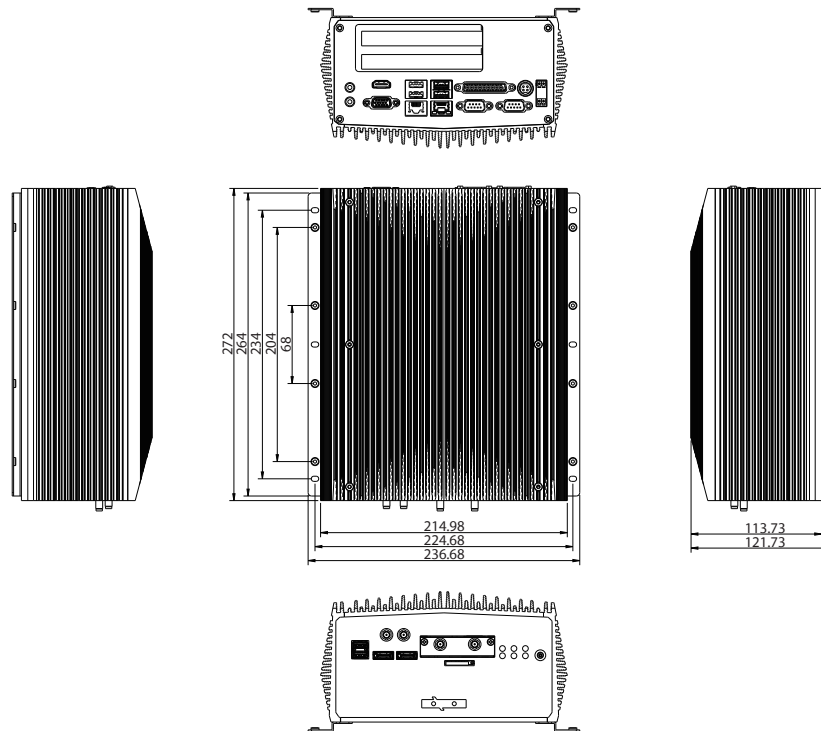

- Power consumption: 10W/slot max

Power Requirements

- AT/ATX power mode (default: ATX power mode)
- Power input: +12 to +30V DC
- Power adapter: optional AC to DC power adapter (24V DC, 120W)

Dimensions

- 215 mm(W) x 272mm (D) x 114mm (H) without wall mount bracket (8.5" x 10.7" x 4.5")

Construction

- Aluminum and metal chassis with fanless design

Environment

- Operating temperature:
Ambient with air flow: -5°C to 50° (according to IEC60068-2-1, IEC60068-2-2, IEC60068-2-14)
- Storage temperature: -20°C to 80°C
- Relative humidity: 10% to 95% (non-condensing)
- Shock protection:- HDD: 20G, half sine, 11ms, IEC60068-2-27- M.2: 50G, half sine, 11ms, IEC60068-2-64
- Vibration protection with HDD condition:
 - Random: 0.5Grms@5~500 Hz, IEC60068-2-64
 - Sinusoidal: 0.5Grms@5~500 Hz, IEC60068-2-6
- Vibration protection with SSD&M.2 condition:
 - Random: 2Grms@5~500 Hz, IEC60068-2-64
 - Sinusoidal: 2Grms@5~500 Hz, IEC60068-2-6

Certifications

- CE approval- EN61000-6-2- EN61000-6-4
- FCC Class A
- UKCA

OS Support

- Windows10 64-bit
- Windows 7

Weight Information

- Gross weight: 6.54kg
- Net weight: 5kg

Ordering Information

Barebone

- **NISE 3600CE2 (P/N: 10J03600C03XE)**
6/7/8/9th Gen Intel® Core™ i7/i5/i3 fanless system with two PCIe x4 expansion (only PCIe x1 signal)
- **NISE 3600CP2 (P/N: 10J03600C02XE)**
6/7/8/9th Gen Intel® Core™ i7/i5/i3 fanless system with two PCI expansion
- **NISE 3600CP2E (P/N: 10J03600C04XE)**
6/7/8/9th Gen Intel® Core™ i7/i5/i3 fanless system with one PCI and one PCI x4 (only PCIe x1 signal) expansion
- **24V, 120W ACTO DC power adapter w/o power cord (P/N: 7400120031X00)**